

CISCOM7210-2GF Series

10-port Layer 2 Gigabit Managed DIN Rail Industrial Ethernet Switch



- 2 × Gigabit SFP ports + 8 × 10/100Base-T(X) ports (RJ45 connector) or 2×Gigabit SFP ports + 2×100Base-FX ports (multi/single-mode, SC/FC/ST connector) + 6×10/100Base-T(X) ports (RJ45 connector)
- Support ring redundancy protocols like MW-Ring v1/v2, ERPS, STP/RSTP to enhance network reliability
- Fast ring redundancy less than 20ms (MW-Ringv1/v2) to improve system communication reliability
- Support QoS (Quality of Service) with prioritization mapping based on 802.1P/DSCP/port, improving communication quality
- Supports single AC 85V~264V/DC110~370V power supply or dual DC 9V-60V power input optional
- With IP40 high-strength aluminum alloy housing and fanless design, the device can reliably operate in the temperature ranging from -40°C to +75°C

Product Description

CISCOM7210-2GF series support 2 Gigabit SFP ports and 8 100M Ethernet ports. This switch utilizes a store-and-forward mechanism, providing robust bandwidth processing capabilities while automatically detecting and reducing transmission errors, ensuring stable, reliable, and efficient data transfer.

The product features carefully selected industrial-grade components, high-standard system design, and production control. It is designed for 35mm standard DIN rail installation, housed in a rugged and durable high-strength metal enclosure. The fanless design allows it to dissipate heat effectively and operate reliably in a wide temperature range from -40°C to +75°C. The device also adheres to high industrial protection standards, making it suitable for challenging work environments, ensuring stable communication performance.

CISCOM7210-2GF series support a range of features and network protocols, including MW-Ring v1/v2, ERPS, STP/RSTP, VLAN, LACP, LLDP, SNMPv1/v2c/v3, RMON, QoS, 802.1X, IGMP snooping, ACL, WEB/TELNET/SSH access control, static aggregation, port mirroring, static MAC address binding, network diagnostics, loopback detection, email logs, alarms, SNTP, system logs, and online firmware upgrades. These capabilities enhance network performance, reliability, and security, making it suitable for various complex network requirements.

Product Features

- Support rate limiting for broadcast, unknown multicast, and unknown unicast packets, with detection and prevention of broadcast and multicast packet storms to avoid network storms
- Support link static aggregation and LACP dynamic aggregation to increase transmission bandwidth and enhance link reliability
- Support port mirroring to collect data from port ingress and egress for network detection and fault management
- Support 802.1Q VLAN, providing Access, Trunk, and Hybrid interfaces for easy division of multiple broadcast domains, enhancing network security
- Support IGMP snooping to establish a layer 2 multicast forwarding table, reducing multicast data broadcast in the network, and conserving network resources
- Support LLDP (Link Layer Discovery Protocol) for obtaining LLDP neighbor device information, monitoring link statuses, facilitating topology management, and fault localization
- Support ERPS (Ethernet Ring Protection Switching) for multiple ring network protection, link backup, fast convergence, and improved network stability
- Support RSTP (Rapid Spanning Tree Protocol), compatible with STP (Spanning Tree Protocol) to eliminate network loops and enhance network reliability
- Support WEB control with HTTP and HTTPS protocol access control, as well as login IP address restrictions
- Support SNMPv1/v2c/v3 centralized management and SNMPv1/v2c/v3 TRAP messages, including support for standard TRAP and private TRAP notifications
- Support RMON (Remote Monitoring) for remote network monitoring, statistics, and alarms for various types of data frames, suitable for remote monitoring and management in network management systems
- Support QoS (Quality of Service) to prioritize voice, video, and critical data transmission within network devices, addressing network congestion
- Support ACL (Access Control List) with customizable filtering rules for various frame types, enabling filtering or rate limiting of specific packets
- Support 802.1X port authentication for user authentication upon network access, providing local and RADIUS login authentication
- Support alarm functions, including power supply failure, network storms, and port disconnection alarms
- Support loopback detection to prevent network loops and associated network storms
- Support system log information recording, downloading, and categorization, with output available through WEB pages, log hosts, and consoles

Technical Specifications

Software	
Switching	<p>Support port configuration, port rate limiting, storm suppression, storm detection, port aggregation, LACP, and port statistics</p> <p>Support 802.1Q VLAN and port isolation</p> <p>Support MAC address aging and static MAC address binding</p>
Redundancy	<p>Support MW-Ringv1/v2 proprietary ring network technology</p> <p>Support ERPS (Ethernet Ring Protection Switching)</p> <p>Support RSTP (Rapid Spanning Tree Protocol) and compatible with STP (Spanning Tree Protocol)</p>
Multicast	<p>Support IGMP snooping</p> <p>Support static multicast MAC address binding</p>
Security Management	<p>Support WEB, TELNET, and SSH access control</p> <p>Support ACL (Access Control List) for filtering traffic</p> <p>Support 802.1X port authentication</p> <p>Support loopback detection, alarms, and Email logging</p>
Management and Maintenance	<p>Support QoS (Quality of Service), SNMP v1/v2c/v3, SNMPv1/v2c/v3 TRAP, RMON, and LLDP</p> <p>Support port mirroring and ping</p> <p>Support user privilege management, system logs, local/network time synchronization, and daylight-saving time</p> <p>Support online restart, factory reset, system upgrade, and configuration file upload/download</p>
Switch Capability	
Processing Type	Store-and-Forward
Backplane Bandwidth	<p>12.8Gbps (CISCOM7210-2GF)</p> <p>5.6Gbps (CISCOM7210-2GF-2F)</p>
Buffer Size	4.1Mbit
MAC Table Size	8K
Interface	
1G Fiber Port	2 x 1000Base-X Gigabit SFP ports, compatible with 100Base-FX


100M Copper Port	8/6 × 10/100Base-T(X) auto-sensing RJ45 ports, support full/half duplex and auto MDI/MDI-X
100M Fiber Port	0/2 × 100Base-FX ports (SC/FC/ST, single-mode/multi-mode, wavelength, and transmission distances are optional)
Relay	1 relay alarm output with 3-pin 3.81mm spacing and locking terminal connectors.
CONSOLE	1 CONSOLE port with a RJ45 connector, supporting RS232 signal for device debugging and command configuration
Status LED	Power indicator, operation indicator, alarm indicator, interface indicator, and Ethernet port speed indicator
Power Supply	
Input Voltage	DC model: Dual DC9V~60V power input, no polarity AC model: Single AC85V~264V/DC110V~370V power supply
Power Consumption	<6W@DC24V (full load)
Connection	5.08mm pitch 5-pin terminal block
Physical Characteristics	
Dimensions	140 × 54 × 110 mm (CISCOM7210-2GF) 160 × 58 × 122 mm (CISCOM7210-2GF-2F)
Installations	Easy installation on 35mm DIN rails
IP Code	IP40
Weight	0.64kg
Working Environment	
Operating Temp	-40°C~+75°C
Storage Temp	-40°C~+85°C
Relative Humidity	5%~95% (non-condensing)
Industry Standard	
EMC	IEC 61000-4-2 (ESD): Level 4 IEC 61000-4-5 (Surge): Level 4 ※Ethernet ports support 6kV surge protection

	IEC 61000-4-4 (EFT): Level 4
Certification	CE, FCC, RoHS


Dimensions

Unit: mm


CISCOM7210-2GF

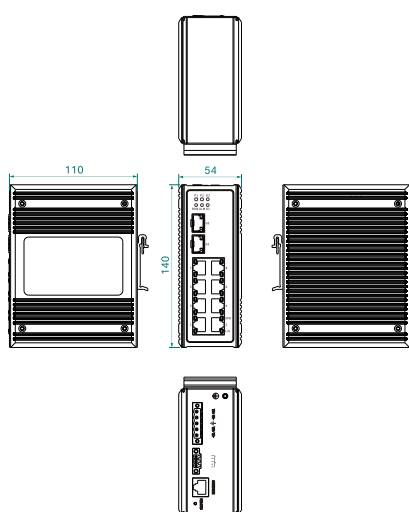

CISCOM7210-2GF-AD220

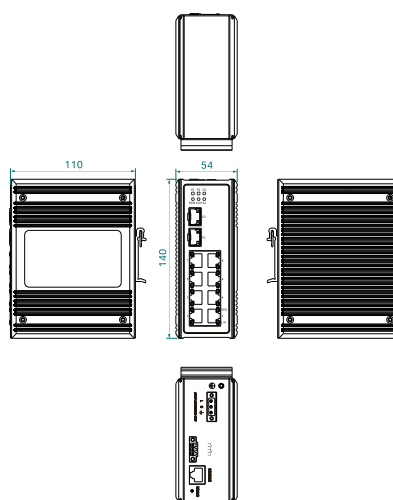

CISCOM7210-2GF-2F

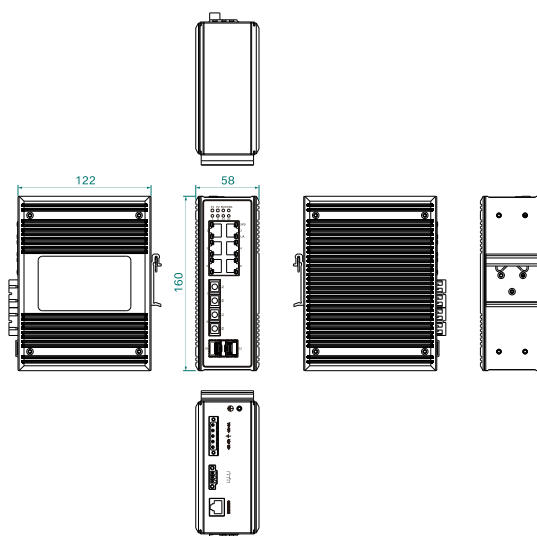

Ordering Information

Standard Model	1G Fiber Port	100M Copper Port	100M Fiber Port	Input Voltage
CISCOM7210-2GF	2	8	/	Dual DC9V~60V power input
CISCOM7210-2GF-AD220	2	8	/	Single AC85V~264V/DC110V~370V Power supply
CISCOM7210-2GF-2F(M/S)	2	2	6	Dual DC9V~60V power input



Contact Us

COME-STAR COMMUNICATION(WUHAN) CO., LTD.

Address: Puneng Industrial Park, Fenghuang Garden 1st Road, East Lake High-Tech Development Zone, Wuhan, China.

Tel: +86-027-59257958

Mail: info@come-star.com

Official site: www.come-star.com

Copyright © Come-Star All rights reserved